



MLSB SPEED BUMP

Our RubberForm MLSB Speed Bumps are effective permanent or temporary traffic calming devices in places like check points and parking lots or parking garages. They are carefully innovated to stay in place: no spikes, no lag bolts, no adhesives needed for temporary use. For permanent installation, use our lag bolts and shield hardware kits (or for parking garages, use our glue down mesh kit).

They're easy to install, easy to relocate, and highly visible day or night. Our MLSB speed bump line is made with 100% American recycled masticated rubber that won't crack, crumble, or corrode, no matter the heat, cold, rain, ice, or snow you throw at it.

KEY FEATURES:

MADE IN THE USA

With 100% fiber-reinforced masticated recycled tire rubber

VERSATILE

Install on any asphalt or concrete surface (or dirt and gravel with our earth anchor)

DURABLE

Won't warp, chip, crack, spall, or corrode in any weather

SAFE

High-visibility AASHTO reflectors (MLSB2.5) or reflective yellow stripe (MLSB3)

EASY

To deploy, install, and recover



Made in the USA



100% Recycled Materials



Unrivaled Quality



UV Resistant






MLSB SPEED BUMP SPECIFICATIONS

RUBBERFORM RF-MLSB2.5

SPECIFICATIONS




- 2.5"H x 18"W x 36"L
- 32 lbs
- 2 embedded, high visibility AASHTO two-way yellow reflectors
- Modular to span any width of road
- Dirt road models available with earth anchors or spikes
- Portable or Permanent – galvanized steel lag bolt and anchors for permanent installation
- 100% fiber-reinforced masticated recycled tire rubber
- Fabrication cuts available for flush ends

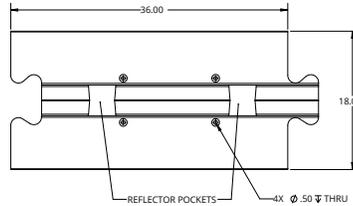

RUBBERFORM RF-MLSB3

SPECIFICATIONS

- 3"H x 18"W x 36"L
- 35 lbs
- Optional high-visibility reflective yellow stripe
- Modular to span any width of road
- Dirt road models available with earth anchors or spikes
- Portable or Permanent – galvanized steel lag bolt and anchors for permanent installation
- 100% fiber-reinforced masticated recycled tire rubber
- Fabrication cuts available for flush ends

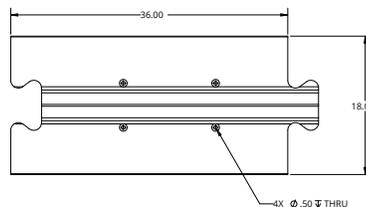

RUBBERFORM RF-MLSBHWK

- 4 - Lag Bolts: 3/8"W x 5"L
- 4 - Washers: 3/8"W x 1"L
- 4 - Anchors



RUBBERFORM RF-DREA14

- 2 - 14" earth anchors for dirt or gravel installation



TOOLS REQUIRED

- A 5/8" Masonry Drill Bit is needed to drill proper holes.
- A 3/4 Nut Drive will be needed to secure the bolts to the lag anchor.

