

RUBBER SPEED CUSHIONS



RubberForm's Rubber Speed Cushions are designed to be easily installed, maintenance-free, and outlast asphalt and concrete. They can be easily installed as a permanent or temporary fixture and do not require road closures, heavy equipment, or large crews.

Our speed cushions are made up of 10 individual modules that are carefully manufactured to ensure that all pieces connect securely using our specially designed dual flange connectors. Each cushion can be assembled with as many white arrows as needed; 3 arrows meet the MUTCD standard.

RubberForm Speed Cushions are the ideal solution for municipalities looking to safely calm traffic speeds on their city streets.

Key Features

- Easy to install, remove, and relocate
- Modular design for custom widths or lengths
- Versatile arrow configurations
- Can be straddled by emergency vehicles
- Only speed cushion manufactured in the USA
- Made in the USA with 100% American recycled rubber



Made in the USA



100% Recycled Material



Increase LEED Score



SPEED CUSHION SPECIFICATIONS

Models

RF-RKSCLC

- Speed cushion left corner
- 3”H x 15-1/4”W x 40”L

RF-RKSCRPA




- Speed cushion ramp – no arrow
- 3”H x 16”W x 40”L

RF-RKSCRC

- Speed cushion right corner
- 3”H x 15-1/4”W x 40”L

RF-RKSCRPA

- Speed cushion ramp with arrow
- 3”H x 16”W x 40”L

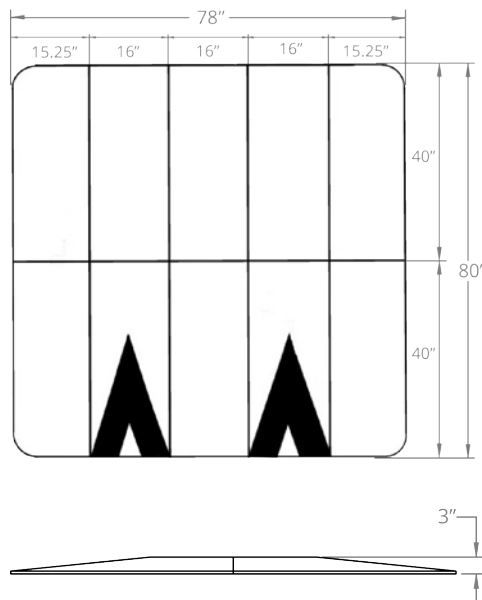

Specifications

- 78”W x 80”L – Standard 10 piece system
- Available with all black or up to 6 white arrowheads

Properties

- Hardness: 70 Shore A
- Specific Gravity: 1.13
- Tensile Strength: 500 psi (min)
- Skid Resistance: 89 (dry)
- Deform Rate: None (100% recovery)

Hardware Kit

RF-SCHWK10

- 10 piece Speed Cushion Hardware Kit
- 40 - Lag Bolts: 10mm x 120mm
- 40 - Washers
- 40 - Anchors
- 40 - Black Caps
- 24 - Dual Flange Connector

RF-SCRT

- 2 Part Epoxy Resin

RF-SCRDG

- Resin Dispensing Gun